

Loading:
Monday – Thursday 0600-1400
Friday- 0600 – 1200
POST CODE: DL3 0RA



Reporting/Arrival:



WHESSOE ROAD ENTRANCE



FOLLOW ROUTE



APPROACH TO MILL



FOLLOW ROUTE



FOLLOW ROUTE



3 BAY NORTH

Loading/Securing:


Stand in **GREEN** area during loading



MIN X 12

MIN X 24

Straps **LC 2000 daN**



LOADS MUST BE SECURED IN LOADING BAY – HAVE STRAPS READY

3. Overview of restraint system

Full load (28 tonnes) on a standard trailer restrained using LC 2000 daN webbing straps:

- ✓ 13 over-the-top webbing straps.
- ✓ Edge protection at all points of contact between lashing and product.
- ✓ Compliant load configuration.
- ✓ Minimum 4-off square section timber dunnage.
- ✓ Ratchets placed on alternating sides.
- ✓ Side pins.

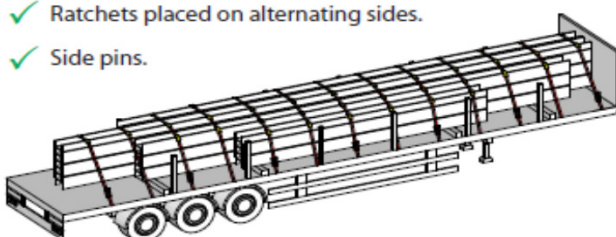


Table 1: Quantity of restraints

Load	LC 2000daN	LC 2500daN	LC 5000daN
0 - 10 t	7	6	3
10 - 15 t	9	8	4
15 - 20 t	10	8	4
20 - 25 t	12	10	5
25 - 28 t	13	11	6

This Load Restraint Guideline is designed to be compliant with the forces stated in EN 12195-1:2003 and VDI 2700.